

**TECHNICAL INFORMATION**

In the interest of continuing product improvement, we reserve the right to change models, specifications, and/or features without prejudice.

PROJECT: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 ARCHITECT: \_\_\_\_\_  
 ENGINEER: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_  
 DATE: \_\_\_\_\_ SALES ENGINEER: \_\_\_\_\_



www.monoxivent.com

info@monoxivent.com

309-794-1000

Page: HRMO-3

**EXPLODED VIEW • 9000-W-TMTR**  
Tube-Type Motor, 28" Drum Width

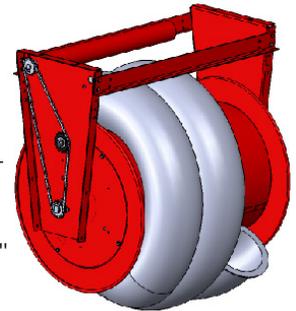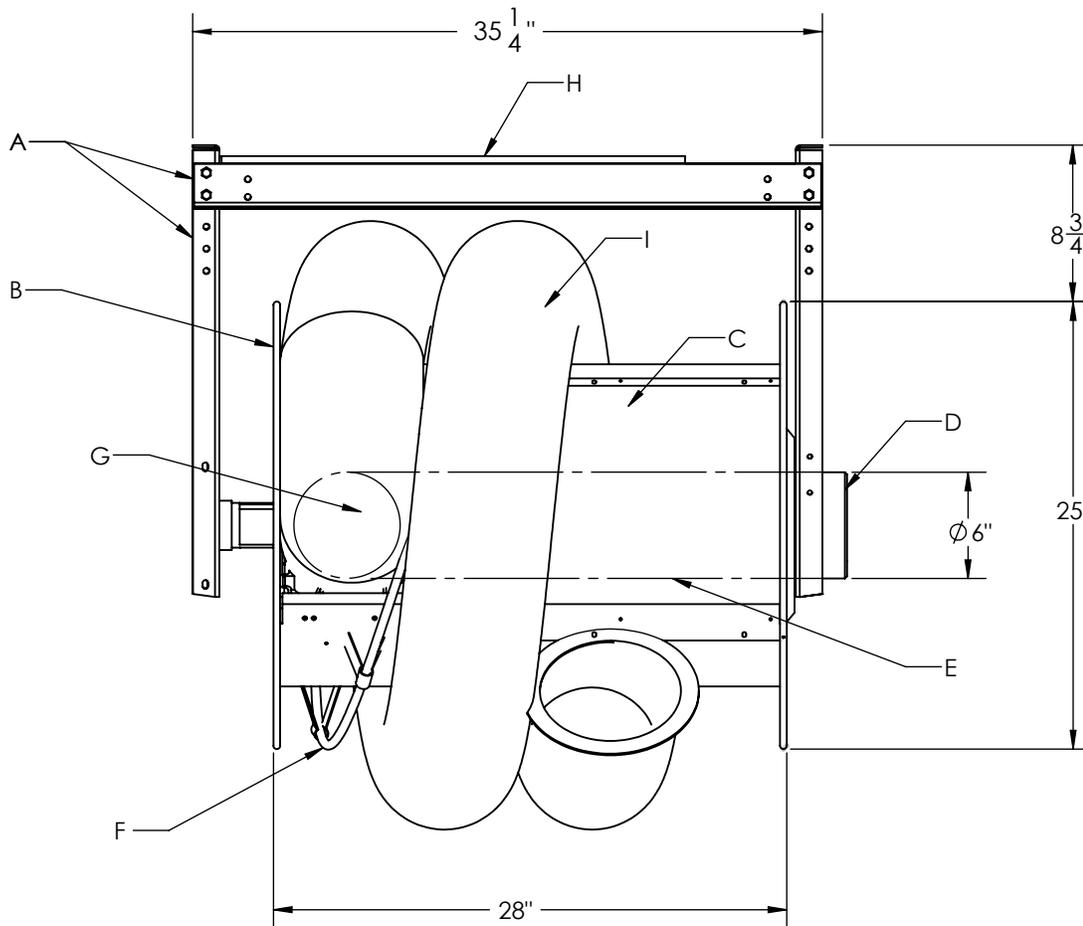

\*Reel shown without hinged chain cover

- A - Heavy Gauge Steel Support Mounting Frame
  - B - End Flange
  - C - Drum Assembly - 18" Diameter
  - D - Duct Connection Fitting & Bearing Assembly
  - E - Internal Hose Tube - 6" Diameter
  - F - Hose Tracking Bar
  - G - Hose to Drum Connector - 4", 5", 6" Diameter
  - H - Tube Motor
  - I - Extraction Hose - 4", 5" or 6" Diameters
- (Standard Hose Lengths are 16', 20', & 24' ... Other Lengths are Available - Please Contact Factory)

<u>Model</u>	<u>Hose Dia.</u>	<u>Max. Hose Capacity on Drum</u>	<u>Drum Diameter</u>	<u>Drum Width</u>	<u>Approx. Wt.</u>
9000-W-TMTR	4"	40'	18"	28"	210 lbs.
9000-W-TMTR	5"	34'	18"	28"	210 lbs.
9000-W-TMTR	6"	32'	18"	28"	210 lbs.

Provided With: \_\_\_\_\_ Diameter \_\_\_\_\_ Feet/Hose \_\_\_\_\_ Series Hose

MOTOR OPERATED HOSE REELS