

**TECHNICAL  
INFORMATION**

In the interest of continuing product improvement,  
we reserve the right to change models,  
specifications, and/or features without prejudice.

PROJECT: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 ARCHITECT: \_\_\_\_\_  
 ENGINEER: \_\_\_\_\_  
 CONTRACTOR: \_\_\_\_\_  
 DATE: \_\_\_\_\_ SALES ENGINEER: \_\_\_\_\_




www.monoxivent.com

info@monoxivent.com

309-794-1000

Page: WSC-14G

**15000-EXT (29')**

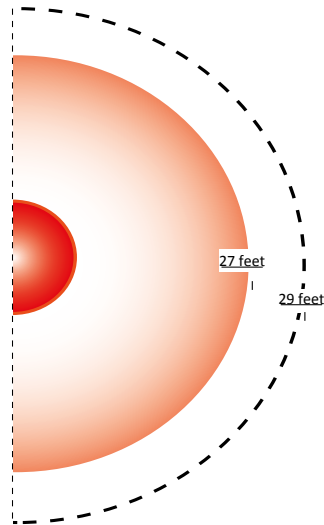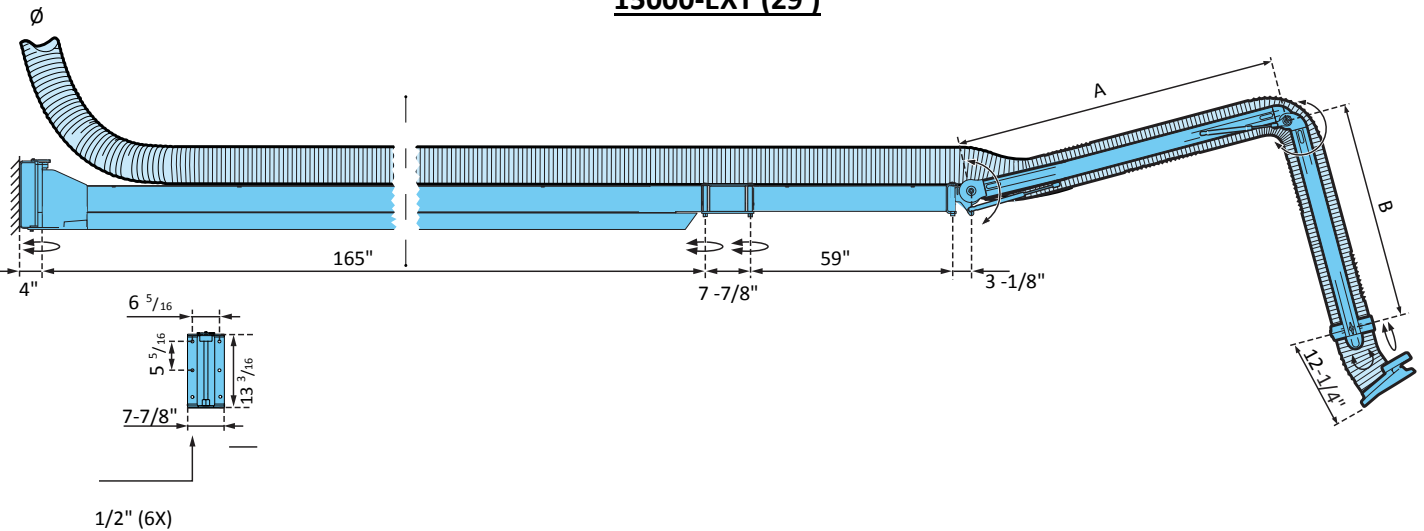

- Working radius\*
- Non-working area
- Max. radius

<u>Model</u>	<u>A</u>	<u>B</u>	<u>Work Radius</u>	<u>Max Radius</u>
15294-EXT	57"	39"	252"*	276"
15295-EXT	57"	39"	252"*	276"
15296-EXT	57"	39"	252"*	276"
15298-EXT	57"	39"	252"*	276"

\* At a mounting height of 8 feet 3 inches and a working height of 30 inches.

**Nozzle:** Injection molded in with hood plate in anodized aluminum.

**Hose:** Hose of dark-blue PE-coated polyamide fabric rated to 215 degrees F.

Other options available (chemical & abrasion resistant) - please consult factory

Optional light kit or fan/damper switch available.