

Underground Systems Floor Outlet - Self Storing Assembly & Plug-in Type



In the interest of continuing product improvement, we reserve the right to change models, specifications, and/or features without prejudice.

PROJECT:	
LOCATION:	
ARCHITECT:	
ENGINEER:	
CONTRACTOR:	
DATE:	

SALES ENGINEER:

```
www.monoxivent.com
```


info@monoxivent.com

309-794-1000

Page: UES-5


• MODELS: 23800 - FOR 3" HOSE; 23802 - FOR DUAL 3" HOSE; 23801 - FOR 4' HOSE; 23806 - FOR 5" HOSE; 23807 - FOR 6" HOSE •

## **SIDE VIEW**

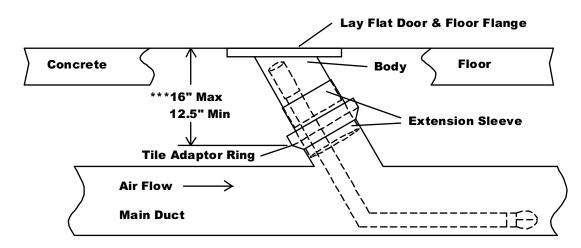

NOTE: This dimension can be increased or decreased

## TOP VIEW

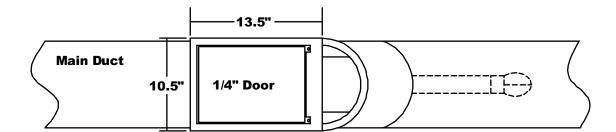

## PRODUCT FEATURES:

DOOR - 1/4", 4-way Structural Solid Steel Plate - 8 5/8" x 11 1/8" Zinc Coated

FLOOR FLANGE - 14-Gauge Stamped Steel Plate Zinc Coated

BODY - 20-Gauge 304 Stainless Steel

SADDLE - 20-Gauge 304 Stainless Steel

NOTE: Above system is used with Monoxivent's VE Duct.