



Blowers Assembly

TECHNICAL INFORMATION


In the interest of continuing product improvement, we reserve the right to change models, specifications, and/or features without prejudice.

PROJECT:	
LOCATION:	
ARCHITECT:	
ENGINEER:	
CONTRACTOR:	
DATE:	SALES ENGINEER:

www.monoxivent.com

info@monoxivent.com

309-794-1000

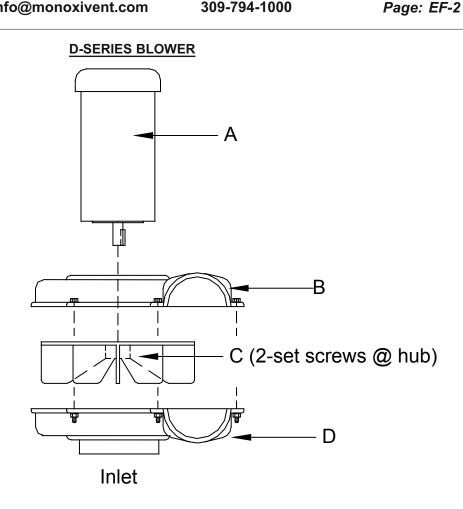

- A TEFC Motor - 3450 RPM - UL UR Recognized as a component and CSA Certified in Canada.
- В Top Housing Constructed of Cast Silumin (Silicon Aluminum Alloy)
- \mathbf{C} Radial Wheel Constructed of Cast Silumin (Silicon Aluminum Alloy)
- Bottom Housing Constructed of Cast Silumin (Silicon Aluminum Alloy)

^{*}The D Series Blower is a versatile exhauster, constructed of Silumin (Silicon Aluminum Alloy). The blower is available

^{*} The D Series Blower may be supplied with or without a mounting bracket. The blower shown (above) displays the motor, housing, and wheel only. (Housings and wheels are available, less motors). The D Series fans are not UL Listed or CSA Certified as an assembly. Motor specifications subject to change without notice.