

TECHNICAL INFORMATION

In the interest of continuing product improvement,
we reserve the right to change models,
specifications, and/or features without prejudice.

PROJECT: _____
LOCATION: _____
ARCHITECT: _____
ENGINEER: _____
CONTRACTOR: _____
DATE: _____ SALES ENGINEER: _____

www.monoxivent.com


info@monoxivent.com

309-794-1000

Page: WSC-36

CONE WELDING NOZZLES

The cone welding nozzle is mainly used for systems where a simple length of hose is connected to a main duct and dropped from over head. The cone nozzle is clamped to the hose and the nozzle is positioned on the work table or a fixture, by means of the optional magnet. Please see the Series 5000 and 6000 Hose, which is commonly used for this type of simple application.

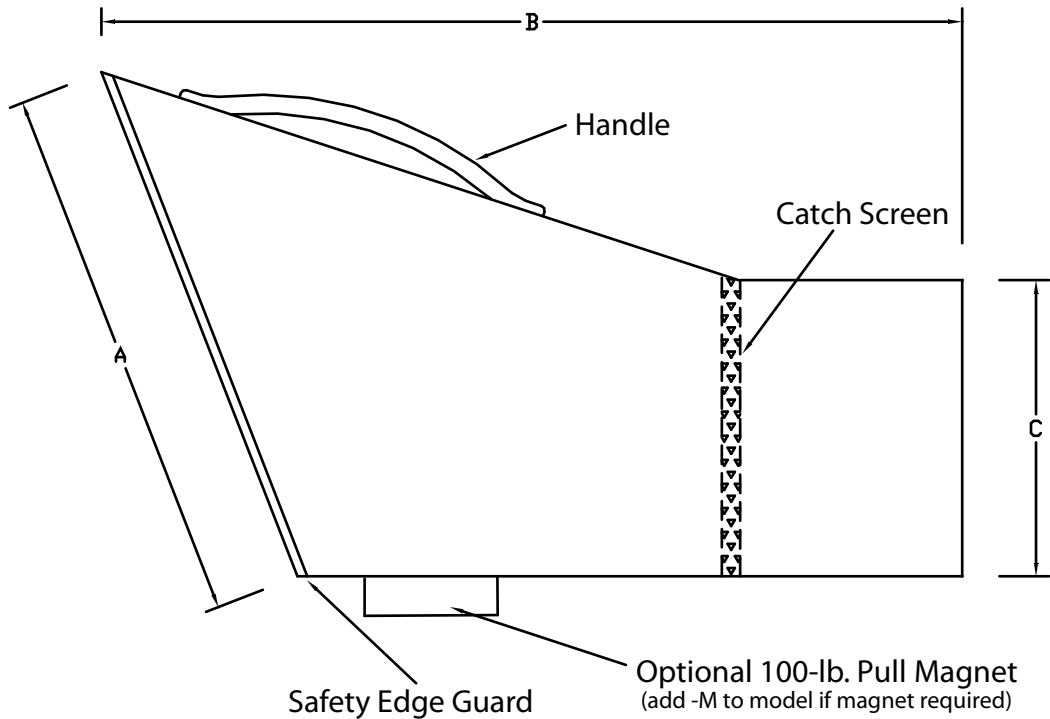

| <u>Model</u> | <u>A</u> | <u>B</u> | <u>C</u> |
|--------------|----------|----------|----------|
| 23937 | 7" | 11" | 3" |
| 23947 | 8" | 12" | 4" |
| 23957 | 9" | 14" | 5" |
| 23967 | 10" | 15" | 6" |
| 23987 | 11" | 16" | 8" |

Notes:

Nozzle is constructed of 20 ga. Stainless Steel.

*Optional hood mounted light kit available, consult factory for pricing